

FORM PTO-1300
(REV 11-98)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER
P/61209TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371

U.S. APPLICATION NO. (If known, use 37 CFR 1.5)

097529201

INTERNATIONAL APPLICATION NO.

PCT/GB98/02586

INTERNATIONAL FILING DATE

August 27, 1998

PRIORITY DATE CLAIMED

July 7, 1998 & October 15, 1997

TITLE OF INVENTION IMPROVEMENTS IN OR RELATING TO LIQUID CRYSTAL DISPLAYS

APPLICANT(S) FOR DO/EO/US David Stewart Nimmo WATSON


Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This express request to begin national examination procedures (35 U.S.C. 371 (f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 37 (b) and PCT Articles 22 and 39(1).
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c)(2))
 - a. ☒ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ A translation of the International Application into English (35 U.S.C. 371 (c)(2)).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)).
 - a. ☒ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
10. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11. to 16. below concern document(s) or information included:

11. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A **FIRST** preliminary amendment.
 - ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
14. ☐ A substitute specification.
15. ☐ A change of power of attorney and/or address letter.
16. ☒ Other items or information:
Receipt Acknowledgement Postcard

09/529201

U.S. APPLICATION NO. 09/529201		INTERNATIONAL APPLICATION NO. PCT/GB98/02586		ATTORNEY'S DOCKET NUMBER P/61209-PCT	
17. <input checked="" type="checkbox"/> The following fees are submitted:				CALCULATIONS PTO USE ONLY	
BASIC NATIONAL FEE (37 CFR 1.492 (a)(1) - (5)):					
Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO.				\$970.00	
International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO.				\$840.00	
International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO.				\$760.00	
International preliminary examination fee paid to USPTO (37 CFR 1.482) but all claims did not satisfy provisions of PCT Article 33(1)-(4).				\$670.00	
International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(1)-(4).				\$96.00	
ENTER APPROPRIATE BASIC FEE AMOUNT =				\$840.00	
Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492 (e)).				\$0.00	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total claims	27 - 20 =	7	X \$18.00	\$126.00	
Independent claims	3 - 3 =	0	X \$78.00	\$0.00	
MULTIPLE DEPENDENT CLAIM(S) (if applicable)				+ \$260.00	
TOTAL OF ABOVE CALCULATIONS =				\$966.00	
Reduction of 1/3 for filing by small entity, if applicable, A Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28).				\$966.00	
SUBTOTAL =				\$966.00	
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492 (f)).				\$0.00	
TOTAL NATIONAL FEE =				\$966.00	
Fee for recording the enclosed assignment (37 CFR 1.21 (h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property +				\$0.00	
TOTAL FEES ENCLOSED =				\$966.00	
				Amount to be: refunded \$	
				charged \$	
<p>a. <input checked="" type="checkbox"/> A check in the amount of \$966.00 to cover the above fees is enclosed.</p> <p>b. <input type="checkbox"/> Please charge my Deposit Account No. <u>11-1145</u> in the amount of \$_____ to cover the above fees. A duplicate copy of this sheet is enclosed.</p> <p>c. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. <u>11-1145</u>. A duplicate copy of this sheet is enclosed.</p>					
<p>NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.</p>					
<p>SEND ALL CORRESPONDENCE TO: Alan ISRAEL, Esq. KIRSCHSTEIN, OTTINGER, ISRAEL & SCHIFFMILLER, P.C. 489 Fifth Avenue New York, New York 10017 (212) 697-3750</p>					
				SIGNATURE: 	
				NAME: <u>Alan Israel</u>	
				REGISTRATION NUMBER: <u>27564</u>	

09/529201
528 Rec'd PCT/PTO 06 APR 2000

Docket No.: P/61209, USP

PATENTS
IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

I hereby certify that this correspondence is being deposited with the U.S. Postal Service as Express Mail No. EL 337 914 588 US in an envelope addressed to: Box: PCT/ Commissioner of Patents and Trademarks, Washington, D.C., 20231, on: April 6, 2000 (date) Alan Israel Reg. No. 27,564

In re: Application of : David Stewart Nimmo WATSON
Deposited : April 6, 2000
For : IMPROVEMENTS IN OR RELATING
TO LIQUID CRYSTAL DISPLAYS

New York, New York
April 6, 2000

PRELIMINARY AMENDMENT

BOX: PCT
Commissioner of Patents and Trademarks
Washington, D.C. 20231

Sir:

Prior to calculation of the filing fee and before examination, kindly amend the
above captioned application as follows:

IN THE SPECIFICATION:

Page 1, between the title and line 1, insert the following heading:

-- BACKGROUND OF THE INVENTION --;

at line 19, insert the following heading:

-- SUMMARY OF THE INVENTION --.

Page 4, line 6, change “polarising” to -- polarizing --; and

change “polarise” to -- polarize --;

line 7, change “polarising” to -- polarizing --;

line 10, change “polarising” to -- polarizing --.

Page 7, at line 22, insert the following heading:

-- BRIEF DESCRIPTION OF THE DRAWINGS --.

Page 9, at line 3, insert the following heading:

-- DETAILED DESCRIPTION OF THE

PREFERRED EMBODIMENTS --;

line 6, change “polarising” to -- polarizing --;

line 22, change “energised” to -- energized --.

Page 10, line 1, change “polarising” to -- polarizing --;

line 19, change “polarising” to -- polarizing --.

Page 11, line 1, change “polarising” to -- polarizing --;

line 11, change “polarising” to -- polarizing --;

line 16, change “polarising” to -- polarizing --.

Page 12, line 10, change “manoeuvre” to -- maneuver --.

Page 13, line 1, change “polarising” to -- polarizing --.

Page 14, line 8, change “polarising” to -- polarizing --;

line 18, change “polarising” to -- polarizing --.

Page 15, line 4, change “polarising” to -- polarizing --;

line 12, change “polarising” to -- polarizing --.

Page 17, line 7, change “polarising” to -- polarizing --;

line 12, change “polarising” to -- polarizing --;

line 19, change “polarising” to -- polarizing --;

line 24, change “polarised” to -- polarized --.

Page 18, line 1, change “polarised” to -- polarized --;

line 6, change “polarised” to -- polarized --.

IN THE CLAIMS:

Page 19, please change the heading to read:

-- I CLAIM: --.

Please cancel claims 18, 19, 27-28 and 32, without prejudice.

Please amend the claims as follows:

Claim 1, line 3, after “comprising”, insert -- the steps of: --.

Claim 3, line 1, change “Claims 1 or 2” to -- Claim 1 --.

Claim 5, line 1, delete “or 4”.

Claim 7, line 1, change “Claims 3 to 6” to -- Claim 3 --.

Claim 8, line 2, change “polarising” to -- polarizing --;

line 3, change “polarise” to -- polarize --;

change “polarising” to -- polarizing --;

line 6, change “polarising” to -- polarizing --.

Claim 9, line 1, change “Claims 1 or 2” to -- Claim 1 --.

Claim 10, line 1, change “any preceding claim” to -- Claim 1 --.

Claim 11, line 1, delete “or 2”.

Claim 12, line 1, change “any preceding claim” to -- Claim 1 --.

Claim 13, line 1, change “any preceding claim” to -- Claim 1 --;

line 3, change “polariser” to -- polarizer --.

Claim 14, line 1, change “any preceding claim” to -- Claim 1 --.

Claim 15, line 1, change “any preceding claim” to -- Claim 1 --.

Claim 17, line 1, change “Claims 1 to 14” to -- Claim 1 --.

Claim 22, line 1, change “Claims 20 or 21” to -- Claim 20 --.

24. (Amended) A composite liquid crystal display comprising at least two liquid crystal displays, each display comprising a pre-manufactured liquid crystal display having a liquid crystal sealed between first and second parallel spaced transparent plates, an excess region of the pre-manufactured liquid crystal display having been removed by cutting both of its transparent plates along a common line, said displays being [in accordance with Claims 20 or 21] supported with their respective cut edges aligned and abutting.

Claim 29, line 13, change “polarising” to -- polarizing --.

Claim 31, line 1, change “Claims 29 or 30” to -- Claim 29 --.

IN THE ABSTRACT:

Delete the "Abstract" on the PCT cover sheet and replace it with the "Abstract of the Disclosure" set forth on a separate sheet attached hereto.


REMARKS

Typographical errors were corrected in the specification. An abstract has been provided on a separate sheet and the claims have been amended to remove multiple dependent claims and improper claims.

Wherefore, an early action on the merits is earnestly solicited.

Respectfully submitted,

KIRSCHSTEIN, OTTINGER,
ISRAEL & SCHIFFMILLER, P.C.
Attorneys for Applicant(s)
489 Fifth Avenue
New York, New York 10017-6105
Tel: (212) 697-3750
Fax: (212) 949-1690



Alan Israel
Registration No. 27,564

--

ABSTRACT OF THE DISCLOSURE

A custom made liquid crystal display is formed from a pre-manufactured liquid crystal display by removing an excess region. The driver card is cut along the line X-X and the excess TABs are disconnected from the conductive layer. Optionally, a narrow strip is removed from each of the polarizing substrates between the lines to expose their associated glass plates. A groove is then cut into the exposed surface of each of the glass plates. Each glass plate is then fractured along the base of its groove so that the excess region is detached from the operative region. The cut edges of the glass plates are then sealed by applying a bead of ultra-violet curing adhesive. The processes of removing an excess region by cutting the glass plates with a laser or by freezing the liquid crystal between the glass-plates and machining through the glass plates are also described. --



5493

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

APPLICANT: Persson et al. **GROUP:** Unknown
SERIAL NO: 09/508,875 **EXAMINER:** Unknown
FILED: March 16, 2000
FOR: **METHOD FOR MOUNTING SELF-SUPPORTING VEHICLE ROOFS**

Box Non-Fee Amendment
Assistant Commissioner of Patents
Washington, D.C. 20231

Sir:

SUPPLEMENTAL PRELIMINARY AMENDMENT

Preliminary to examination, please amend the above-identified application as follows:

IN THE CLAIMS:

Please amend the claims as follows:

2. (Amended) A mounting method according to claim 1, [characterized in that] wherein the self-supporting vehicle roof [(1)] is mounted onto the vehicle body in the final section of an assembly line for motor vehicles when the majority of the interior components of the motor vehicle already have been mounted.

3. (Twice Amended) A mounting method according to claim 1, [characterized in that] wherein the first [(4, 4', 4'')] and second [(5, 5', 5'')] mounting points are joined together in pairs by means of any one or a combination of several of the following methods: gluing, welding, screwing, bolt joining, plastic application and thermoplastic joining.

4. (Twice Amended) A mounting method according to claim 1, [characterized in that] wherein the self-supporting vehicle roof [(1)] when being mounted comprises an outer cover layer, a core, an inner cover layer, said insulating layer and decorative layer, and that the inner cover layer together with the outer cover layer and the core thereby provide a sandwich structure with high stiffness and low weight, whereas the insulating layer provides sound and heat insulating properties and softness, and the decorative layer provides a decorative interior surface which is intended to be visible from within a passenger compartment of the motor vehicle [(2, 2', 2'')].

5. (Twice Amended) A method according to claim 1, [characterized in that] wherein the outer cover layer, when the self-supporting vehicle roof [(1)] is mounted, provides external surfaces of said vehicle roof [(1)] with a surface finish allowing the completely assembled motor vehicle [(2'')] to proceed directly to sales after a conventional polishing operation.

REMARKS

The application is now considered to be in condition for allowance, and an early indication of same is requested.

Respectfully submitted,



Matthew E. Connors
Registration No. 33,298
Samuels, Gauthier & Stevens
225 Franklin Street, Suite 3300
Boston, Massachusetts 02110
Telephone: (617) 426-9180
Extension: 112

-1-

18. Sep. 1999

IMPROVEMENTS IN OR RELATING TO LIQUID CRYSTAL DISPLAYS

This invention relates to a liquid crystal display, to a method of manufacturing a liquid crystal display, and also to apparatus to aid manufacture of a liquid crystal display.

5 Generally, displays for reproduction of information have historically been of a cathode ray tube type construction. In an environment where space is limited traditional displays were typically manufactured to be square, or square with rounded corners, in order to make the best use of the limited space available.

Liquid crystal displays are currently considered suitable substitutes for applications previously requiring cathode ray tube technology. The replacement of cathode ray tubes can be either for new applications or for the purpose of upgrading existing technology through retrofit design. When manufactured in large quantities, liquid crystal displays are of modest cost compared with an equivalent cathode ray tube.

15 JP A 8146444 illustrates a typical method of manufacturing a prior art liquid crystal display. A display panel, which has been swollen by liquid crystal therein, is divided into two parts. The first part is arranged to receive liquid crystal and the second part is arranged to provide an overspill compartment, such that when the panel is pressed and heated, the liquid crystal causing the panel to swell is allowed to enter the second part. The boarder between the first and attached second part is removed to leave only the first part to form a liquid crystal display panel. This method of manufacturing can be used when producing panels in large quantities.

20

-1a-

However, when liquid crystal displays need to be custom made in relatively low numbers to suit specific requirements, the cost per unit is very high due to expensive tooling and manufacturing charges. Furthermore, manufacturing yield rates are low, high pixel defect levels have to be tolerated and there are substantial delivery delays.

5

It is an objective of the present invention to facilitate the production of custom made liquid crystal displays.

-2-

According to a first aspect of the present invention, a method of manufacturing a liquid crystal display having a liquid crystal sealed between first and second substantially parallel spaced transparent plates which form an operative area of the display, comprises removing an excess region of a pre-manufactured liquid crystal display by cutting the first and second plates to isolate the excess region of the first and second plates and to expose cut edges along the operative areas of the first and second plates.

The terms "cutting" or "cut" as used throughout this document means the action of separating an excess region from an operative region in any way. For example, this may be achieved by grooving and then fracturing a plate, or cutting through a plate with a laser or machine tool.

The inventor has determined that, contrary to the present understanding of the nature of liquid crystal displays, the highly complex electronic and physical structure of such displays can be re-manufactured to provide alternative shaped displays at a much reduced cost per unit, when compared with the cost of a custom made display, and without substantial damage to the display. Furthermore, standard sized displays are readily available devices which may be found in personal computers and other products which use standard sized liquid crystal displays and are manufactured in very high volumes, and hence at low cost. A liquid crystal display comprises a liquid crystal sealed between first and second parallel spaced transparent plates which form an operative area of the display. In such a display there is a miniscule spacing between the plates. The inventor has discovered that this spacing, when the plates are re-manufactured, exerts a capillary action on the liquid crystal which retains the liquid crystal between the plates without appreciable loss or disruption of

-3-

the liquid crystal.

By using a method in accordance with the invention, it is possible to start with an inexpensive standard display and re-fashion it to particular requirements, instead of designing and manufacturing a small number of expensive custom displays or ordering such custom displays from a specialist manufacturer with an added high premium.

The transparent plates are usually formed from glass or another suitable transparent material. The method may include cutting the first and second plates at an oblique angle

The method may also include removing the excess region of the pre-manufactured liquid crystal display by forming a first groove in the first plate of sufficient depth to isolate the excess region of the first plate, forming a second groove in the second plate of sufficient depth to isolate the excess region of the second plate, the second groove being substantially aligned with the first groove, and fracturing the first plate and second plate along their respective grooves.

The method may include forming the first and second grooves simultaneously and may also include fracturing the first and second plates simultaneously along the first and second grooves.

The method may include fracturing the first plate along the first groove prior to forming the second groove in the second plate and fracturing the second plate along the second groove

The method, may further include fracturing each grooved plate by placing the other plate on a ridge substantially corresponding with the groove and applying pressure to the excess region.

5 Preferably, the liquid crystal display is placed on an apparatus comprising a fracturing platform having a first light polarising layer to polarise radiation emitted from a radiation source and a second light polarising layer located between a viewer's eye position and the liquid crystal display, and the method may include viewing the propagation of each fracture along its groove as an area against a contrasting background through the second light
10 polarising layer.

Alternatively, the method may include removing the excess region of the pre-manufactured liquid crystal display by cutting the first and second plates using a laser beam thereby isolating the excess region of the first and second plates and exposing the cut edges along
15 the operative areas of the first and second plates. The laser beam may cut entirely through both plates, and this may done from one side of the display. Use of a laser to cut the plates gives good control of the cutting process and is particularly suitable where more complex or rounded configurations are required. It is also envisaged that a laser beam can be used to form grooves in each plate and then pressure applied to the excess area to fracture each
20 plate along the groove. In this manner contamination of the liquid crystal is avoided since the plates may be cleaned after grooves has been formed.

In a further alternative, the method may include removing the excess region of the pre-manufactured liquid crystal display by freezing the liquid crystal between the first and second

-5-

plates and machining through the first and second plates thereby isolating the excess region of the first and second plates and exposing the cut edges along the operative areas of the first and second plates. It will be understood that the term freezing includes any reduction in the viscosity of the liquid crystal thereby inhibiting its egress from between the first and second plates

Although freezing is particularly applicable to this further alternative, it may also be used in other methods in accordance with the invention, for example, when a laser beam is used or the plates are fractured following grooving. Accordingly, the method may include freezing the liquid crystal between the first and second plates prior to cutting the first and second plates.

In the case where conductive layers are adhered to the first and second plates and are electrically connected to driver connections, the method may also include cutting and removing any driver connection associated with the excess region prior to cutting the first and second plates. In the case where a light polariser is adhered to at least one of the plates, the method may include cutting and removing a narrow strip of the light polariser in a region either side of where the cut edge associated with each plate is to be formed.

The method may also include removing air voids within the liquid crystal by applying pressure to at least one of the plates.

Preferably, the method may include sealing the exposed fractured edges to retain the liquid

-6-

crystal between the first and second plates. The method may include sealing the exposed cut edges using a laser beam arranged to melt the first and second plates together along the exposed cut edges. This is particularly convenient where a laser beam is used to remove the excess region.

5

Alternatively, the method may include removing an excess region from at least two pre-manufactured liquid crystal displays to leave exposed cut edges, aligning and positioning the exposed cut edges of one of the liquid crystal displays with the corresponding exposed cut edges of an adjacent liquid crystal display, and laminating the liquid crystal displays to form a single display with increased operative area.

10

According to a second aspect of the invention, a liquid crystal display comprises a pre-manufactured liquid crystal display having a liquid crystal sealed between first and second parallelly spaced transparent plates and in which an excess region of the pre-manufactured liquid crystal display has been removed by cutting both of its transparent plates along a common line. In this manner a modified liquid crystal display is provided as a selected portion of a pre-manufactured liquid crystal display.

15

The first and second plates may be cut at an oblique angle. The cut edges of the transparent plates may be resealed to retain the liquid crystal. A laser beam may be used to melt the first and second plates together.

20

A composite liquid crystal display preferably comprises at least two of these modified liquid crystal displays supported with their respective cut edges aligned and abutting. The cut

-7-

edges are preferably supported in alignment by a transparent lamina adhered over their first transparent plates. The cut edges may additionally be supported in alignment by a second lamina adhered over their second transparent plates.

5 According to a third aspect of the present invention apparatus, to aid removal of an excess region of a pre-manufactured liquid crystal display having liquid crystal sealed between first and second parallel spaced transparent plates which form an operative area of the display and in which a groove has been formed in one of the plates between the excess region and an operative region of the liquid crystal display, comprises a fracturing platform having a light polarising layer located between transparent first and second supporting surfaces, a radiation source located to emit radiation through the fracturing platform, a raised region arranged on an opposite surface of the fracturing platform to which the light source is located, the raised region being arranged to contact a plate of the liquid crystal display in a region substantially corresponding to the groove in the other plate, and a light polarising layer disposed between a viewer's eye position and a liquid crystal display located on the fracturing platform. In this manner a viewer observes the liquid crystal display as a dark area and when the viewer applies pressure to the excess region any fracture in the grooved plate appears as a light area.

20 The operative area of the liquid crystal display may be clamped to the fracturing platform whilst leaving the excess region freedom of movement. The raised region may be a ridge.

The invention will now be described, by way of example only, with reference to the accompanying drawings, in which:-

-8-

Figure 1 is a diagrammatic cross-section through a conventional prior art liquid crystal display taken along the line 1-1 in Figure 2;

Figure 2 is a plan view of the pre-manufactured liquid crystal display illustrated in Figure 1, but showing the removal of an excess region along its right-hand edge;

Figure 3 is an underplan view of the liquid crystal display illustrated in Figure 2,

Figure 4 is a plan view similar to Figure 2, but showing the removal of an excess region along its right-hand lower corner;

Figure 5 is a plan view of a pre-manufactured liquid crystal display that has been processed by removing a first excess region along its right-hand edge and a second excess region along its bottom edge to provide a decreased display area;

Figures 6 and 7 are plan views of pre-manufactured liquid crystal displays which have been processed to remove curved excess regions.

Figure 8 schematically illustrates sealing of cut edges formed in a pre-manufactured liquid crystal display.

Figure 9 illustrates the processing of four pre-manufactured liquid crystal displays, each similar to that shown in Figure 5, to provide an increased display area, and

-9-

Figure 10 is a diagrammatic side elevation of apparatus for aiding removal of an excess area of a pre-manufactured liquid crystal display

In Figure 1, a typical liquid crystal display 10 comprises liquid crystal 11 trapped between first and second parallel spaced transparent glass plates 12, 13 by an ultra-violet cured adhesive seal 14. Patterned light polarising substrates 15, 16 are respectively adhered to the outer surfaces of the glass plates 12, 13. Very thin conductive layers 17, 18 are respectively coated over the inner surfaces of the glass plates 12, 13 and are used to generate an electric field between corresponding portions of the conductive layers 17, 18 to cause the liquid crystal 11 in the field to rotate and block light from passing. No light can pass the rotated electric crystal within the electric field and a viewer will observe a dark area corresponding to the shape of the electric field. By controlling a plurality of such corresponding portions of the conductive layers 17 and 18, the liquid crystal display 10 can be operated to convey information to the viewer.

In a first embodiment, as will be seen from Figures 1 and 2, the glass plate 13 and its associated conductive layer 18 are larger than the glass plate 12 so that they extend to the left towards a vertical driver card 19, and upwards towards a horizontal driver card 20. A series of ribbon connectors or TABs 21 electrically interconnect the driver cards 19 and 20 with the various portions of the conductive layers 17 and 18 in well-known manner so that the driver cards 19, 20 will determine which portions of the conductive layers 17 and 18 are to be energised.

Figure 3 shows the reverse side of the liquid crystal display 10, the reverse side of the

-10-

vertical and horizontal TAB's 21, driver cards 19 and 20, and the light polarising substrate 16.

In Figures 2 and 3 the required width of the final liquid crystal display 10 is indicated by a chained line 22 and is achieved by removing an excess region 23 of the liquid crystal display 10 in the following manner. With reference to Figure 2, one of the vertical driver cards 20 is cut, using any suitable cutting apparatus, along a broken line X-X which is located just outside an operative region 24 of the liquid crystal display 10 that is to be retained. The vertical driver card 20 may be held in a support fixture, not shown, and a fine tooth saw may be used to cut through the vertical driver card 20 along the line X-X. This cut must be beyond any TAB 21 carrying connections to the operative region 24 that are to be retained. Any rough edges can be filed to prevent any track cut from shorting.

The portion of the vertical driver card 20 for the excess region 23 is then removed by disconnecting the corresponding TABs 21 using a suitable solvent or heating process. In this manner the removed portion of the vertical driver card 20 and associated TABs 21 are not damaged and can be retained for potential repair use.

Optionally, a narrow strip of the light polarising substrate 15, defined by the chained line 22 and a parallelly-spaced chained line 25 on the opposite side of the line X-X, is then removed using suitable cutting apparatus which will not damage the exposed portion of the underlying glass plate 12. For example, a scalpel can be used to cut along the lines 22, 25 so that the narrow strip of the light polarising substrate 15 can be peeled off to expose the glass plate 12 which is then cleaned to remove all traces of the adhesive that was used to bond the strip

-11-

of the light polarising substrate 15 to the glass plate 12.

A groove is then formed in the glass plate 12 along the line X-X of sufficient depth to promote the generation of a fracture along the length of the groove when pressure is applied to the excess region 23. This groove can be formed using a scribe, a machine tool set to machine a controlled depth, or a diamond wheel cutter. It may also be possible to use a laser beam operated to form a groove of controlled depth. An apparatus used to aid removal of the excess region 23 is described below with reference to Figure 7.

The liquid crystal display 10 is then reversed to expose its opposite surface as shown in Figure 3. Again, optionally a narrow strip of the polarising substrate 16 is removed from either side of the line X-X to expose a region of the glass plate 13. The process of removing the narrow strip of the substrate 16 is the same as that already described for the removal of the narrow strip of the substrate 15. The exposed portion of the glass plate 13 is then cleaned to remove all traces of the adhesive that was used to bond the strip of the light polarising substrate 16 to the glass plate 13. A groove is then formed in the glass plate 13 along the line X-X of sufficient depth to promote the generation of a fracture along the length of the groove when pressure is applied to the excess region 23. This can again be achieved by using the apparatus that is described below with reference to Figure 7.

It will be understood that either a groove can be formed in glass plate 12 and the glass plate then fractured along that groove prior to forming a corresponding groove in the other glass plate 13 or corresponding grooves can be formed in both glass plates 12, 13 prior to forming fractures in each plate 12, 13.

-12-

By fracturing the glass plates 12 and 13 along the line X-X, the excess region 23 of the liquid crystal display 10 can be removed to expose cut edges of the glass plates 12 and 13.

The minuscule spacing between the glass plates 12 and 13 generates a capillary action which acts on the liquid crystal 11 and serves to retain the liquid crystal 11 between the glass plates 12 and 13 so that no appreciable loss or disruption of the liquid crystal 11 occurs.

The process of removing the excess region 22 can create minute voids in the liquid crystal 11, particularly if the cut edges of the transparent plates 12 and 13 do not coincide. Provided the fractures form a clean break, these voids rapidly disappear. Gentle pressure applied to the glass plates 12, 13 can also be used to eliminate some voids and manoeuvre persistent voids to the cut edges and hence out of the liquid crystal 11. Positioning the line X-X along which fractures are formed further away from the operative region 24 reduces the risk of voids or bubbles being formed.

Although the glass plates 12 and 13 could be cut right through along the line X-X, as described below with reference to Figures 6 to 8, there is an increased chance of contaminating the liquid crystal 11 in the operative region with particles of glass and cutting fluid. By only partly cutting through the glass plates 12 and 13, such contaminants can be positively excluded from contact with the liquid crystal, and the glass plates 12 and 13 can be cleaned before being fractured along the line X-X.

If desired, the grooves in the glass plates 12 and 13 can be formed simultaneously by feeding the liquid crystal display between a pair of diamond wheel cutters, thereby also ensuring that the two grooves are parallelly aligned. It will be understood that the grooves formed in glass

-13-

plates 12, 13 and the cutting of the polarising substrates 15, 16 can be performed in a single action.

Irrespective of whether the grooves in the glass plates 12 and 13 are formed separately or at the same time, in this particular embodiment, the cut edges of the glass plates 12 and 13 are sealed by applying a bead of ultra-violet curing liquid crystal display sealant adhesive, and then curing with an ultra-violet light source. This process provides a liquid crystal display 10 having a reduced operative region 24 without the need to commission the production of a custom display by a manufacturer.

Figure 4 illustrates a modification of the process described with reference to Figure 2 to permit the liquid crystal display 10 to be chamfered, that is to have a corner removed. The same reference numerals have been used as in Figures 2 and 4 to denote equivalent features and only the points of difference are now described. The excess region 23 is removed from the operative region 24 along a broken line Y-Y which is inclined to both of the card drivers 19 and 20. The removal process is exactly the same as described with reference to Figure 2 except that there is no need to cut the vertical card driver 20 or to remove any TAB 21.

Figure 5 show how the liquid crystal display 10, produced as described with reference to Figures 1 to 3, can have its operative region 24 reduced still further by removing a horizontal excess region 26 together with the lower portion of the horizontal card driver 19 and associated TAB 21.

Figures 6 and 7 illustrate a second embodiment of the process for removing an excess region

-14-

from a pre-manufactured liquid crystal display. The same reference numerals have been used as those in Figures 2 to 5 to denote equivalent features

The required shape of the final liquid crystal display 10 is indicated by a solid line 22 and is achieved by removing an excess region 23 of the liquid crystal display 10 in the following manner.

With reference to Figure 6, narrow strips of light polarising substrate 15, 16, defined by the solid line 22 and a parallelly-spaced line 25 on the opposite side of broken line C-C, are optionally removed from both sides of the liquid crystal display 10 and the exposed areas cleaned, as previously described. A laser, not shown, is then used to cut through glass plate 12 and glass plate 13 along line C-C. In this manner both glass plates 12, 13 are cut at the same time and the excess region 23 of the liquid crystal display 10 can be removed to expose cut edges of the glass plates 12 and 13.

With reference to Figure 7, a portion of the vertical driver card 20 for the excess region 23 is cut and removed by disconnecting the corresponding TAB's 21, as previously described. Narrow strips of light polarising substrate 15, 16, define by the solid line 22 and a parallelly-spaced line 25 on the opposite side of broken line S-S, are optionally removed from both sides of the liquid crystal display 10 and the exposed areas cleaned, as previously described. A laser, not shown, is then used to cut through glass plate 12 and glass plate 13 along line S-S simultaneously, as previously described, to expose cut edges of the glass plates 12 and 13.

-15-

It will be understood that although Figures 6 and 7 illustrate curved lines C-C and S-S the process of cutting with a laser can equally be applied to the straight line cuts shown in Figures 2 to 5 or other cut shapes not illustrated. Furthermore, the laser may be used to cut through the driver card and polarising substrate.

The gap between the plates 12 and 13 is then sealed either by applying a bead of ultra-violet curing sealant adhesive and curing under ultra-violet light conditions, or applying a glass frit or using the laser to weld the plates 12 and 13 together.

In Figure 8, the glass plates 12 and 13 can be welded to one another by applying a laser beam B in direction D along the cut edge thereby melting the glass plates 12, 13 and forming a seal between the plates 12 and 13. To aid clarity of Figure 8, the light polarising substrates and the conductive layers are not shown and the card drivers and associated TAB's have also been omitted.

In a third embodiment of the process, not illustrated, the liquid crystal within the liquid crystal display or a part thereof can be frozen or have its viscosity reduced using liquid nitrogen and both plates can then be machined through in one action using, for example, a diamond wheel cutter. In this manner the risk of contamination of the liquid crystal is mitigated and the number of voids introduced into the liquid crystal is reduced.

Should a liquid crystal display be required with a larger operative region then, as shown in Figure 9, four liquid crystal displays 10 can be prepared as described with reference to Figure 5 and can have their respective operative regions 24 combined by aligning and

-16-

abutting their respective cut edges 27 and 28, the four liquid crystal displays 10 then being laminated to form a single display with increased operative area. Such lamination is preferably achieved by adhering transparent plates to the entire front and back surfaces of the four operative regions 24 using an optically clear ultra-violet cured adhesive.

The processes described above allow rectangular or square format liquid crystal displays, with reduced or increased operative areas, to be produced quickly and cheaply by reshaping standard commercial rectangular shaped displays which are currently produced in vast quantity at low unit cost and with high quality. Furthermore, since the shaping process is only limited by the positioning of the cards drivers 19, 20 and the excess regions 23, 26 to be deactivated, the process could also be used to produce liquid crystal displays of other shapes, including chamfered corners as taught by Figure 4, curved shapes taught by Figures 6 and 7 and also L-shaped and triangular-shaped formats.

The above process is effective for removing an excess region of a pre-manufactured liquid crystal display in which the cards drivers are relatively simple in format with only a few passive devices associated with each TAB. Where more complex circuitry exists and the card drivers cannot simply be cut, the process described above can be limited to the technique for cutting the transparent plates, the driver cards then being re-engineered or re-positioned using flexible circuit extensions.

The groove or final cut edge of each plate in a liquid crystal display may be arranged such that it forms an oblique angle. In this manner a greater surface area is presented for sealing or bonding to a second liquid crystal display arranged to abut the first liquid crystal display

-17-

when forming a display having a greater operative area

Figure 10 illustrates apparatus 31 to aid removal of an excess area 23 from a pre-manufactured liquid crystal display 10. As described above, the liquid crystal display 10 comprises liquid crystal 11 sealed between first and second parallel spaced glass plates 12, 13 which also define an operative region 24 that is to be retained. To aid clarity of Figure 10, the light polarising substrates and the conductive layers are not shown, and the card drivers are also omitted. However, these would typically be arranged as described above with reference to Figure 1

A groove 32 has been formed part-way through the glass plate 12 as described above. The apparatus 31 comprises a fracturing platform 33 having a light polarising layer 34 located between transparent first and second supporting surfaces 35, 36. A radiation source 37, for instance a light source, is arranged to emit radiation through the fracturing platform 33. A raised region, in the form of a ridge 38, is carried by the first supporting surface 25 and is arranged to contact the lower glass plate 13 of the liquid crystal display 10 along a line coinciding with the groove 32 formed in the transparent plate 12.

The apparatus also comprises a light polarising layer 39 disposed between an operator's eye position 40 and the liquid crystal display 10 which is positively located on the fracturing platform 33.

In operation, the operator observes the liquid crystal display 10 as a dark area since radiation from source 37 is polarised by the layer 34, polarised by the liquid crystal 11 and further

-18-

polarised by the layer 39. As the operator applies pressure to the excess region 23, the glass plate 12 will start to fracture along groove 32. As the fracture spreads along the groove 32, it will appear as a light area against the dark area background of the liquid crystal display 10 since the thickness of the liquid crystal 11 is different in the regions where fracture has occurred than in those where it has not, varying the degrees of lighting. Radiation will therefore not be polarised by the liquid crystal 11 along the fracture.

Once a fracture in the glass plate 12 has been achieved, a groove corresponding to groove 32 is formed in the glass plate 13 as has been described above. The liquid crystal display 10 is then turned over and repositioned on the fracturing platform 33 with the glass plate 12 contacting the raised edge 38 along either the line of the groove 32 or the line of the corresponding groove in glass plate 13. Again pressure is applied by the operator to the excess region 23 so as to fracture the glass plate 13 along its corresponding groove. When both glass plates 12 and 13 have been fractured along their respective grooves 32, the excess region 23 is removed and the gap between the fractures sealed as described above.

Alternatively, the liquid crystal display 10 can have grooves 32 on both plates 12, 13 prior to fracturing, as described above. As a further alternative, once a plate 12 or plates 12, 13 have had grooves 32 applied, the liquid crystal display is placed on the raised edge 38 such that the excess region 23 contacts the raised edge 38 and a downward pressure is applied to groove or grooves 32 to fracture the plate 12 or plates 12, 13

CLAIMS

1. A method of manufacturing a liquid crystal display having a liquid crystal sealed between first and second substantially parallel spaced transparent plates which form an operative area of the display, comprising removing an excess region of a pre-manufactured liquid crystal display by cutting the first and second plates to isolate the excess region of the first and second plates and to expose cut edges along the operative areas of the first and second plates
2. A method, as in Claim 1, including cutting the first and second plates at an oblique angle.
3. A method, as in Claims 1 or 2, including removing the excess region of the pre-manufactured liquid crystal display by forming a first groove in the first plate of sufficient depth to isolate the excess region of the first plate, forming a second groove in the second plate of sufficient depth to isolate the excess region of the second plate, the second groove being substantially aligned with the first groove, and fracturing the first plate and second plate along their respective grooves.
4. A method, as in Claim 3, including forming the first and second grooves simultaneously.
5. A method, as in Claim 3 or 4, including fracturing the first and second plates simultaneously along the first and second grooves.

6. A method, as in Claim 3, including fracturing the first plate along the first groove prior to forming the second groove in the second plate and fracturing the second plate along the second groove.
7. A method, as in Claims 3 to 6, including fracturing each grooved plate by placing the other plate on a ridge substantially corresponding with the groove and applying pressure to the excess region
8. A method, as in Claim 7 and wherein the liquid crystal display is placed on an apparatus comprising a fracturing platform having a first light polarising layer to polarise radiation emitted from a radiation source and a second light polarising layer located between a viewer's eye position and the liquid crystal display, including viewing the propagation of each fracture along its groove as an area against a contrasting background through the second light polarising layer.
9. A method, as in Claims 1 or 2, including removing the excess region of the pre-manufactured liquid crystal display by cutting the first and second plates using a laser beam thereby isolating the excess region of the first and second plates and exposing the cut edges along the operative areas of the first and second plates.
10. A method, as in any preceding claim, including freezing the liquid crystal between the first and second plates prior to cutting the first and second plates.

-21-

- 11 A method, as in Claim 1 or 2, including removing the excess region of the pre-manufactured liquid crystal display by freezing the liquid crystal between the first and second plates and machining through the first and second plates thereby isolating the excess region of the first and second plates and exposing the cut edges along the operative areas of the first and second plates.
12. A method, as in any preceding claim and wherein conductive layers are adhered to the first and second plates and are electrically connected to driver connections, including cutting and removing any driver connection associated with the excess region prior to cutting the first and second plates
13. A method, as in any preceding claim and wherein a light polariser is adhered to at least one of the plates, including cutting and removing a narrow strip of each light polariser in a region either side of where the cut edges associated with each plate is to be formed.
14. A method, as in any preceding claim, including removing air voids within the liquid crystal display by applying pressure to at least one of the plates.
15. A method, as in any preceding claim, including sealing the exposed cut edges to retain the liquid crystal between the first and second plates.
16. A method, as in Claim 15, including sealing the exposed cut edges using a laser beam arranged to melt the first and second plates together along the exposed cut edges

17. A method, as in Claims 1 to 14, including removing an excess region from at least two pre-manufactured liquid crystal displays to leave exposed cut edges, aligning and positioning the exposed cut edges of one of the liquid crystal displays with the corresponding exposed cut edges of an adjacent liquid crystal display, and laminating the liquid crystal displays to form a single display with increased operative area
18. A method substantially as illustrated in and/or described with reference to any of the accompanying drawings.
19. A liquid crystal display manufactured by the method of any preceding claim.
20. A liquid crystal display comprising a pre-manufactured liquid crystal display having a liquid crystal sealed between first and second parallel spaced transparent plates and in which an excess region of the pre-manufactured liquid crystal display has been removed by cutting both of its transparent plates along a common line.
21. A liquid crystal display, as in Claim 20, wherein the first and second plates are cut at an oblique angle.
22. A liquid crystal display, as in Claims 20 or 21, wherein the cut edges of the transparent plates have been resealed to retain the liquid crystal.
23. A liquid crystal display, as in Claim 22, wherein a laser beam has been used to melt

-23-

the first and second plates together

24. A composite liquid crystal display comprising at least two liquid crystal displays in accordance with Claims 20 or 21 supported with their respective cut edges aligned and abutting
25. A composite liquid crystal display, as in Claim 24, in which the cut edges are supported in alignment by a transparent lamina adhered over their first transparent plates.
26. A composite liquid crystal display, as in Claim 25, in which the cut edges are additionally supported in alignment by a second lamina adhered over their second transparent plates.
27. A liquid crystal display substantially as illustrated in and/or described with reference to any of Figures 2 to 8 of the accompanying drawings.
28. A composite liquid crystal display substantially as illustrated in and/or described with reference to Figure 9 of the accompanying drawings
29. Apparatus, to aid removal of an excess region of a pre-manufactured liquid crystal display having liquid crystal sealed between first and second parallel spaced transparent plates which form an operative area of the display and in which a groove has been formed in one of the plates between the excess region and an operative

-24-

region of the liquid crystal display, comprising

a fracturing platform having a light polarising layer located between transparent first and second supporting surfaces,

a radiation source located to emit radiation through the fracturing platform,

a raised region arranged on an opposite surface of the fracturing platform to which the light source is located, the raised region being arranged to contact a plate of the liquid crystal display in a region substantially corresponding to the groove in the other plate, and

a light polarising layer disposed between a viewer's eye position and a liquid crystal display located on the fracturing platform.

30. Apparatus, as in Claim 29, wherein the operative area of the liquid crystal display is clamped to the fracturing platform whilst leaving the excess region free to move
31. Apparatus, as in Claims 29 or 30, wherein the raised region is a ridge.
32. Apparatus, substantially as illustrated in and/or described with reference to Figure 10 of the accompanying drawings.

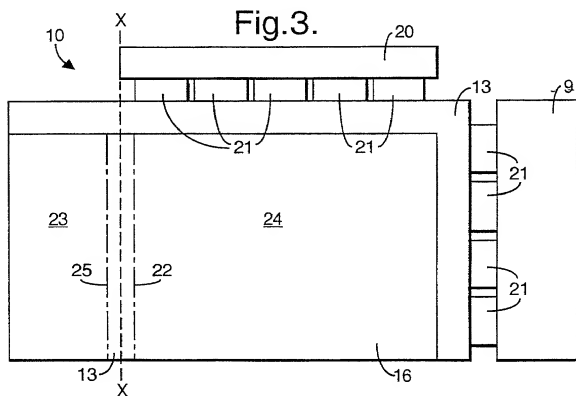
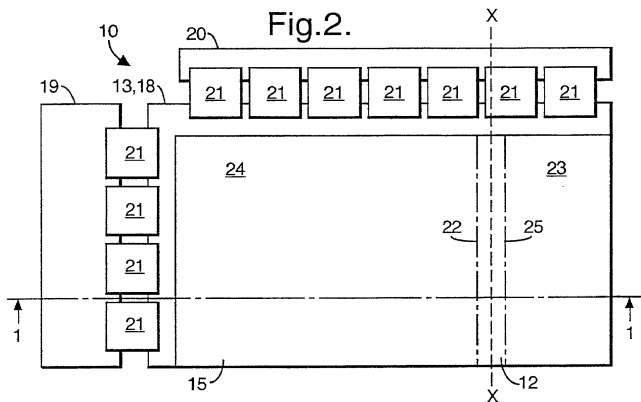
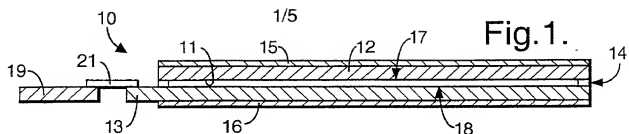


Fig.4.

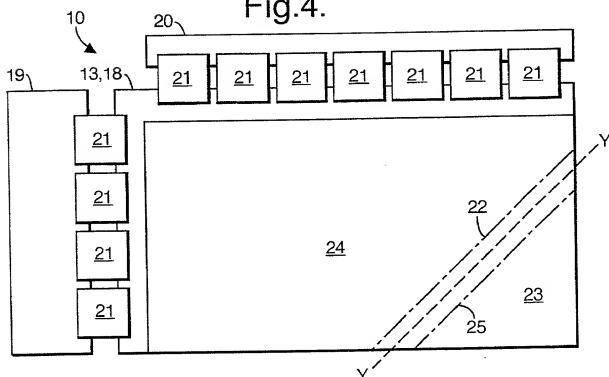


Fig.5.

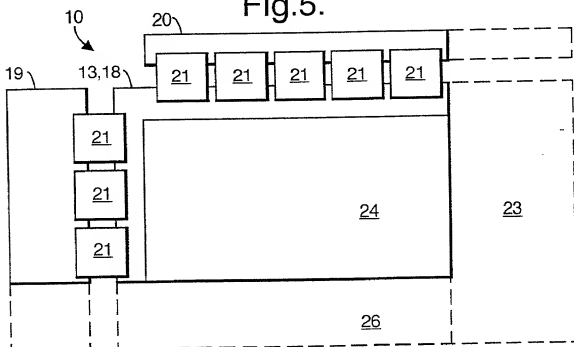


Fig.6.


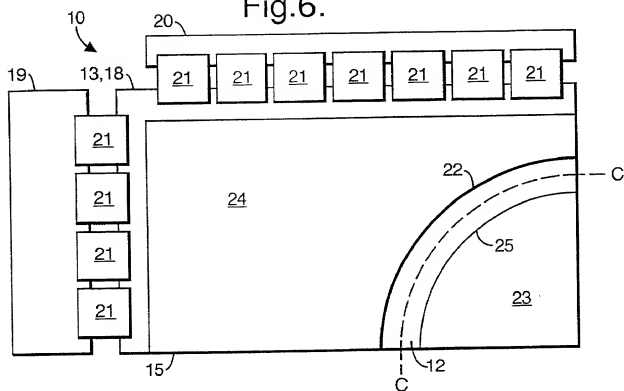


Fig.7.

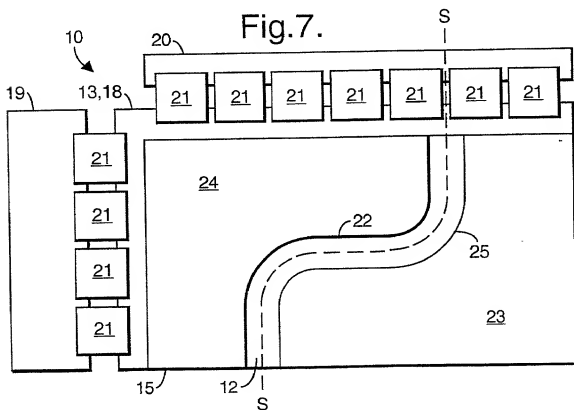

4/5

Fig.8.

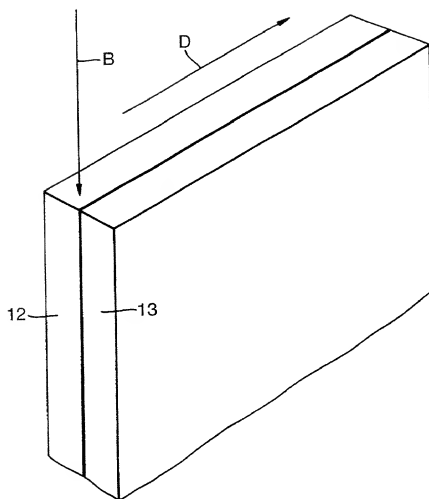


Fig.9.


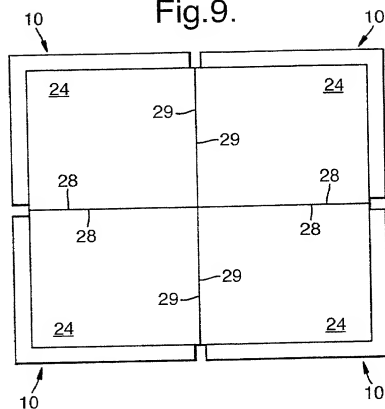


Fig.10.

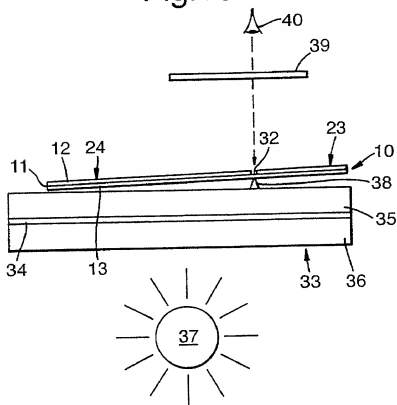

Type a plus sign (+) inside this box → ☐

Approved for use through 9/30/98
 Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

PTO/SB/01 (6-95)
 OMB 0651-0032

+

0010/PTO
 Rev. 6/95

U.S. Department of Commerce
 Patent and Trademark Office

DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION

☐ Declaration Submitted with Initial Filing OR ☒ Declaration Submitted after Initial Filing

Attorney Docket Number

P/61209

First Named Inventor

WATSON

COMPLETE IF KNOWN

Application Number

89/529,201

Filing Date

APRIL 6, 2000

Group Art Unit

Examiner Name

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

IMPROVEMENTS IN OR RELATING TO LIQUID CRYSTAL DISPLAYS

(Title of the Invention)

the specification of which

☐ is attached hereto

OR

☒ was filed on (MM/DD/YYYY)

APRIL 6, 2000 (Dep.)

as United States Application Number or PCT International

Application Number

89/529,201

and was amended on (MM/DD/YYYY)

(if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37 Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code §119 (a)-(d) or §365(b) of any foreign application(s) for patent or inventor's certificate, or §365 (e) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
				YES	NO
9721804.4	United Kingdom	10.15.97	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
9814577.4	United Kingdom	7. 7. 98	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
PCT/GB93/02586	International	8. 27. 98	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority sheet attached hereto.

I hereby claim the benefit under Title 35, United States Code § 119(e) of any United States provisional application(s) listed below.

Application Number(s)	Filing Date (MM/DD/YYYY)	<input type="checkbox"/> Additional provisional application numbers are listed on a supplemental priority sheet attached hereto.

Burden Hour Statement: This form is estimated to take 4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

